

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/2/14	

APPROVED: _____

DATE: _____ TITLE: _____


D

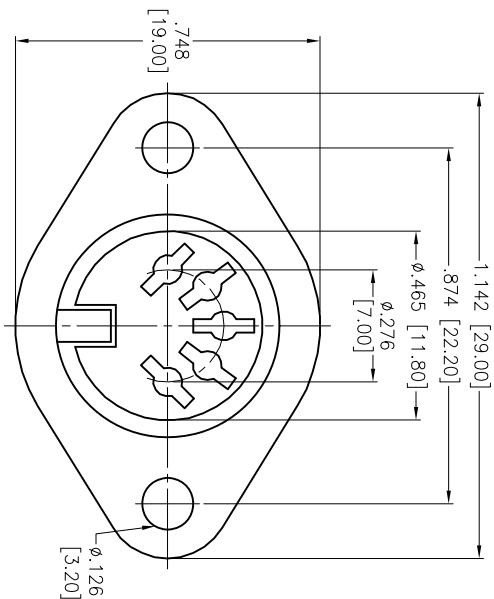

C

ARRANGEMENT OF CONTACTS	NO OF CONTACTS	Part Number
	4	DJP-004A-A
	5	DJP-005A-A
	6	DJP-006A-A
	7	DJP-007A-A
	8	DJP-008A-A

B

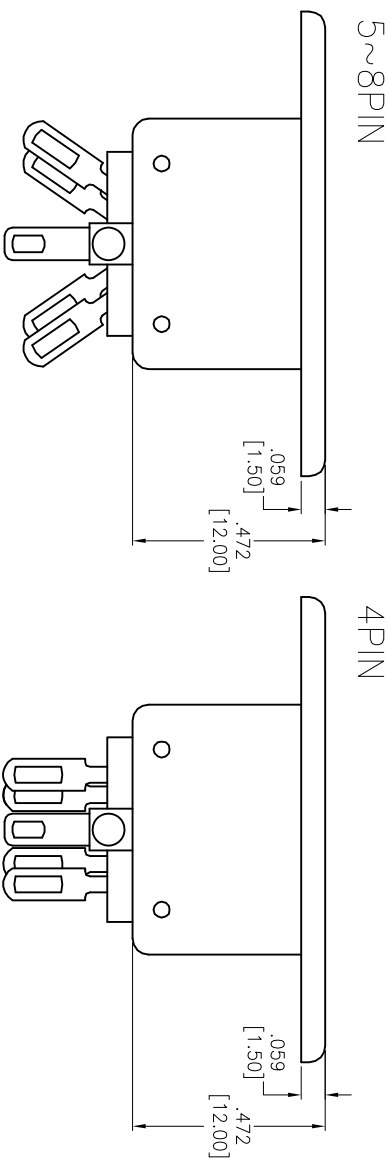

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Contact Terminal: Brass

Earth Terminal: Phosphor Bronze

Socket Case: SPC, Nickel plated

Rivet: Aluminum

Plating:

Tin over Copper underplate overall

Electrical:

Contact resistance: 20m Ohms max.

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 1000 VAC min rms

Environmental:

Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN JACK, PANEL MOUNT WITH MOUNTING FLANGE AND SOLDER EYELETS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				HOLE SIZES			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	HR	4/2/14		CHECKED	AY	4/2/14	
APPROVED							
SIZE				PART NO.			
X				DJP-00XA-A			
REF: S00250T				SCALE: NTS			
				SHEET 1 OF 1			