




SK32BF THRU SK320BF

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 3.0 Ampere

SMBF

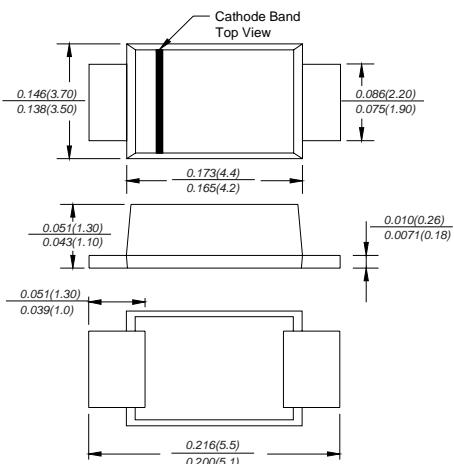

Dimensions in inches and (millimeters)

FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free-wheeling, and polarity protection applications

MECHANICAL DATA

Case: JEDEC SMBF molded plastic body

Terminals: leads solderable per MIL-STD-750, Method 2026

Mounting Position: Any

Weight: 57mg/0.002oz

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	SK32BF	SK34BF	SK36BF	SK38BF	SK310BF	SK315BF	SK320BF	UNITS		
Marking code		K32B	K34B	K36B	K38B	K310B	K315B	K320B			
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	80	100	150	200	VOLTS		
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	105	140	VOLTS		
Maximum DC blocking voltage	V _{DC}	20	40	60	80	100	150	200	VOLTS		
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	3.0						Amp			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80.0			70.0			Amps			
Maximum instantaneous forward voltage at 3.0A	V _F	0.55	0.70	0.85	0.95				Volts		
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5	5.0	0.3	3.0				mA		
Typical junction capacitance (NOTE 1)	C _J	450		400					pF		
Typical thermal resistance (NOTE 2)	R _{θJA}	50.0							°C/W		
Operating junction temperature range	T _J	-50 to +125							°C		
Storage temperature range	T _{STG}	-50 to +150							°C		

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas



RATINGS AND CHARACTERISTIC CURVES SK32BF THRU SK320BF

Fig.1 Forward Current Derating Curve

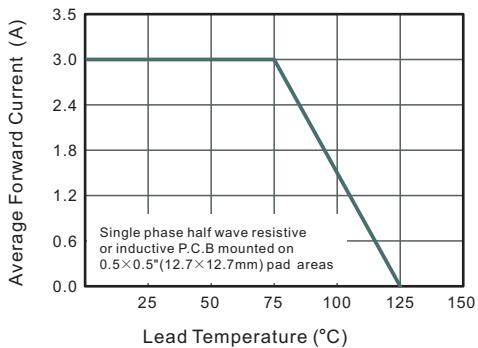


Fig.2 Typical Reverse Characteristics

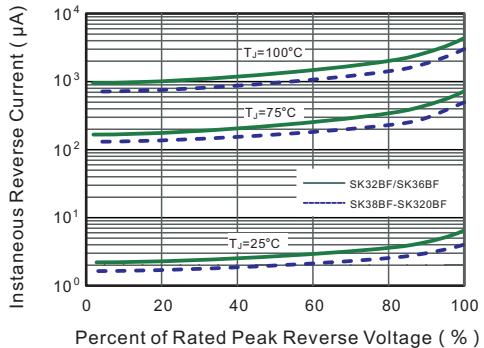


Fig.3 Typical Forward Characteristic

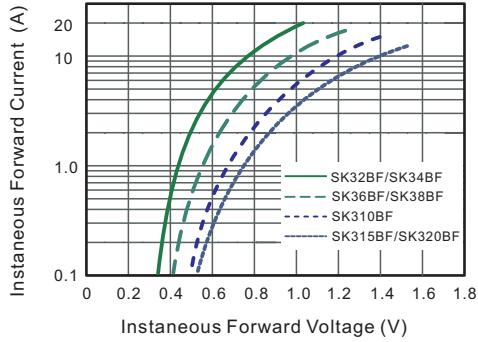


Fig.4 Typical Junction Capacitance

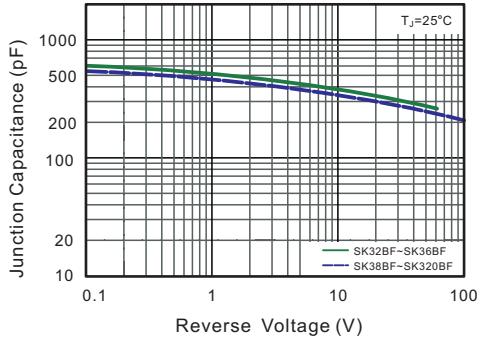


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


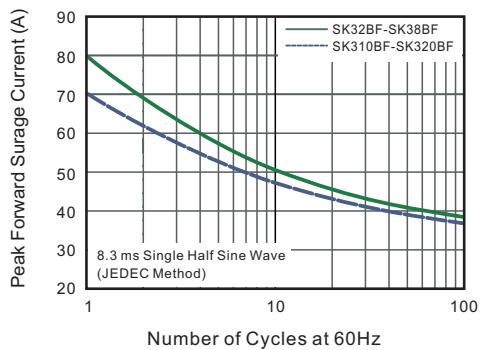


Fig.6- Typical Transient Thermal Impedance



The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

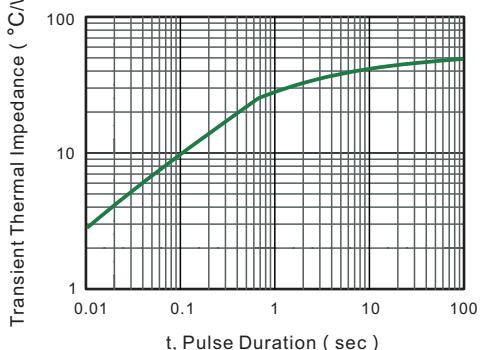