


[Obsolete product]

Agilent has a new name
Keysight Technologies.

Keysight Technologies Inc. is the world's leading electronic measurement company, transforming today's measurement experience through innovations in wireless, modular, and software solutions. With its HP and Agilent legacy, Keysight delivers solutions in wireless communications, aerospace and defense and semiconductor markets with world-class platforms, software and consistent measurement science.

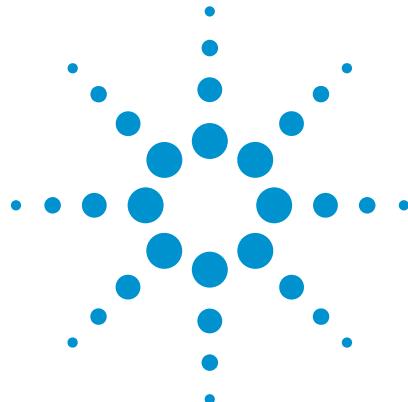

Agilent U1730 Series Handheld LCR Meters

Take your expectations higher with
the latest LCR meters

Data Sheet



Agilent's U1730 Series handheld LCR meters allow you to measure at frequencies as high as 100 kHz—a capability typically found only in benchtop meters. Get measurements done faster using the one-touch automatic identification function button which displays component type and more detailed component analysis such as Z, ESR, and DCR. Ideal for testing on the go, these LCR meters operate on a battery that lasts up to 16 hours. With the U1730 Series that is built for your convenience, you can perform quick and basic LCR measurements at an affordable price.



Agilent Technologies

Features

Key features

- 20,000 counts resolution
- 0.2% basic accuracy
- Wide LCR ranges with three to five selectable test frequencies (up to 100 kHz for U1733C)
- Auto identification (*Ai*) automatically determines and displays component type and measurements
- Detailed component analysis with DCR, ESR, Z, D, Q, and θ functions
- Battery life of 16 hours/AC-powered
- IR-to-USB connectivity for data logging to PC

Frequency up to 100 kHz

The test frequency now extends as high as 100 kHz, providing more flexibility to test a wider range of components. A higher test frequency, for example 100 kHz, is useful for applications such as testing aluminum electrolytic capacitors used in switching power supply circuits.

Automated identification

With *Ai* the testing and measuring experience is easy; eliminating unnecessary trial and error time—with just a single push of a button. This unique feature automatically specifies L, C, or R with parallel and series mode, without the need to manually change buttons.

Detailed component analysis

The handheld LCR meters allows you to test various component types, including secondary components of Dissipation Factor (D), Quality Factor (Q), and Angle Indication of Impedance (θ). This new handheld series also includes other functions that result in a more detailed component analysis. For example, the built-in Equivalent Series Resistance (ESR) function helps you better understand the inherent resistance behavior typically found in capacitors across selected frequencies. DCR is a built-in DC resistance measurement that eliminates the use of a separate digital multimeter (DMM) for component test.

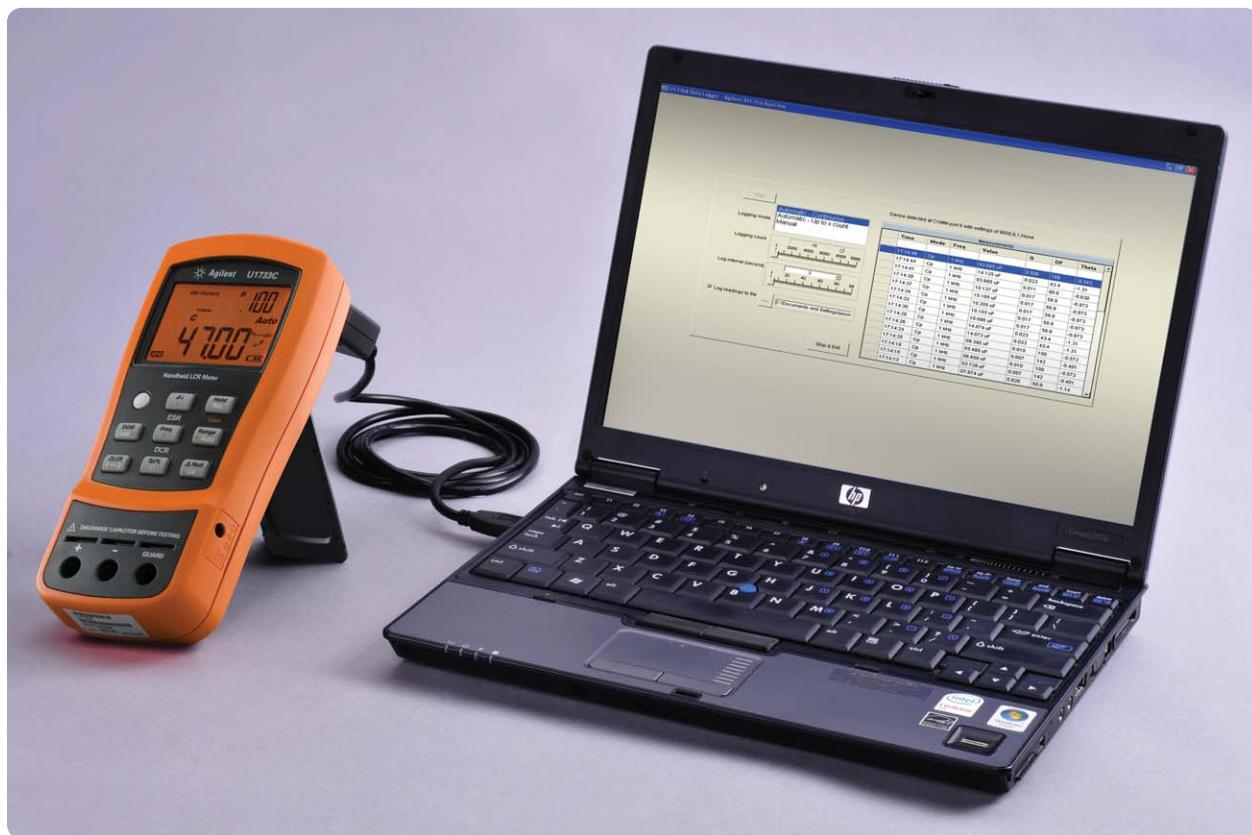


Figure 1. Automate the recording of continuous readings when you hook the U1731C/U1732C/U1733C to a PC

Take a Closer Look



Figure 2. Front view of the U1733C

U1731C/U1732C/U1733C Electrical Specifications

Accuracy is given as \pm (% of reading + counts of least significant digit) at $23^\circ\text{C} \pm 5^\circ\text{C}$, with relative humidity less than 80%. Please refer to the User Guide about the measuring mode specified for each range of L/C/R, series or parallel mode. Measurements performed at the test socket and necessary Open and Short corrections must prior be done. The accuracy is verified by design and specified type tests.

Impedance/Resistance		Accuracy = AZ + Offset					
Range	Resolution	U1731C/U1732C/U1733C			U1732C/U1733C	U1733C	
		100 Hz	120 Hz	1 kHz	10 kHz	100 kHz	DCR
2 Ω^1	0.0001 Ω	0.7% + 50	0.7% + 50	0.7% + 50	0.7% + 50	1.0% + 50	0.7% + 50
20 Ω^1	0.001 Ω	0.7% + 8	0.7% + 8	0.7% + 8	0.7% + 8	0.7% + 8	0.7% + 8
200 Ω^1	0.01 Ω	0.2% + 3	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5	0.2% + 3
2000 Ω	0.1 Ω	0.2% + 3	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5	0.2% + 3
20 k Ω	0.001 k Ω	0.2% + 3	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5	0.2% + 3
200 k Ω	0.01 k Ω	0.5% + 5	0.5% + 5	0.5% + 5	0.5% + 5	0.7% + 8	0.5% + 5
2000 k Ω	0.1 k Ω	0.5% + 5	0.5% + 5	0.5% + 5	0.7% + 5	NA	0.5% + 5
20 M Ω	0.001 M Ω	2.0% + 8	2.0% + 8	2.0% + 8	5.0% + 8	NA	2.0% + 8
200 M Ω	0.01 M Ω	6.0% + 80	6.0% + 80	NA	NA	NA	6.0% + 80

- This accuracy for the ranges of 2~200 Ω is specified after Math Null which is used to substrate the resistance of test leads and the contact resistance.

Notes:

- For the ranges of 20 M Ω and 200 M Ω , the R.H. is specified for < 60%
- Resistance is specified to Q < 10 and D > 0.1, otherwise the accuracy is $(AZ + \text{Offset}) \times \sqrt{1 + Q^2}$
- Equivalence Series Resistance (ESR) measurement is determined by impedance measurement and range. The maximum display is up to 199.99 k Ω and the accuracy is $(AZ + \text{Offset}) \times \sqrt{1 + Q^2}$

Capacitance		Accuracy = AC + Offset					
Range	Resolution	U1731C/U1732C/U1733C			U1732C/U1733C	U1733C	
		100 Hz	120 Hz	1 kHz	10 kHz	100 kHz	
20 mF	0.001 mF	0.5% + 8	0.5% + 8	NA	NA	NA	
2000 μF	0.1 μF	0.5% + 5	0.5% + 5	0.5% + 8	NA	NA	
200 μF	0.01 μF	0.3% + 3	0.3% + 3	0.5% + 5	0.5% + 8	NA	
20 μF	0.001 μF	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5	5.0% + 10	
2000 nF	0.1 nF	0.2% + 3	0.2% + 3	0.2% + 3	0.2% + 3	0.7% + 10	
200 nF	0.01 nF	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 3	0.7% + 10	
20 nF	0.001 nF	0.5% + 5	0.5% + 5	0.2% + 3	0.5% + 3	0.7% + 10	
2000 pF ¹	0.1 pF	0.5% + 10	0.5% + 10	0.5% + 5	0.5% + 3	2.0% + 10	
200 pF ¹	0.01 pF	NA	NA	0.5% + 10	0.8% + 10	2.0% + 10	
20 pF ¹	0.001 pF	NA	NA	NA	1.0% + 20	2.5% + 10	

- This accuracy for the ranges of 20 pF~2000 pF is specified after Math Null which is used to substrate the stray capacitances for test leads.

Notes:

- The accuracy for the ceramic capacitor will be influenced depending on the dielectric constant (K) of the material used to make the ceramic capacitor. For related influence factors, please refer to the *Component dependency factors* section in the *Impedance Measurement Handbook*, downloadable for free at <http://www.agilent.com/find/lcrmeters>

U1731C/U1732C/U1733C Electrical Specifications

Inductance		Accuracy = AL + Offset				
Range	Resolution	U1731C/U1732C/U1733C			U1732C/U1733C	U1733C
		100 Hz	120 Hz	1 kHz	10 kHz	100 kHz
20 μ H	0.001 μ H	NA	NA	NA	1.0% + 5	2.5% + 20
200 μ H	0.01 μ H	NA	NA	1.0% + 5	0.7% + 3	2.5% + 20
2000 μ H	0.1 μ H	0.7% + 10	0.7% + 10	0.5% + 3	0.5% + 3	0.8% + 20
20 mH	0.001 mH	0.5% + 3	0.5% + 3	0.2% + 3	0.3% + 3	0.8% + 10
200 mH	0.01 mH	0.5% + 3	0.5% + 3	0.2% + 3	0.2% + 3	1.0% + 10
2000 mH	0.1 mH	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5	1.0% + 10
20 H	0.001 H	0.2% + 3	0.2% + 3	0.5% + 5	1.0% + 5	2.0% + 10
200 H	0.01 H	0.7% + 5	0.7% + 5	1.0% + 5	2.0% + 8	NA
2000 H	0.1 H	1.0% + 5	1.0% + 5	2.0% + 8	NA	NA

Phase Angle of Impedance				
Range	Resolution	Accuracy (θ_e)	Condition	
-180° ~180°	0.1°/1°	(AZ + Offset/Zx) x180/ π	D < 1 or Q > 1	
Impedance	Zx	AZ	Offset	θ_e
1999.9 Ω	19999	0.2%	3	$\pm 0.12^\circ$
199.9 Ω	1999	0.2%	3	$\pm 0.20^\circ$
19.9 Ω	199	0.2%	3	$\pm 0.98^\circ$
1.9 Ω	19	0.2%	3	$\pm 9.16^\circ$

Notes:

- Specifications are applicable to all models (U1731C, U1732C, and U1733C) unless specified
- The "AZ" and Offset are the accuracy specified at impedance
- The " π " is approximately 3.14159

Dissipation/Quality Factor				
Function	Range	Accuracy (De)	Condition	
Z	0.001~999	AZ + Offset/Zx x 100% + 3	D < 1 or Q > 1	
L	0.001~999	AL + Offset/Lx x 100% + 3	D < 1 or Q > 1	
C	0.001~999	AC + Offset/Cx x 100% + 3	D < 1 or Q > 1	
Capacitance	Cx	AC	Offset	De
88.88 μ F	8888	0.2%	3	0.203% + 3

Notes:

- Specifications are applicable to all models (U1731C, U1732C, and U1733C) unless specified
- The "AZ, AL, AC" and Offset are the accuracy specified at Impedance, Inductance, and Capacitance, respectively
- The Zx, Lx, and Cx are the display count of the reading. For example, the Cx is 8888 as if the capacitance is 88.88 μ F for the range of 200 μ F.
- The Quality Factor is the reciprocal of Dissipation Factor

U1731C/U1732C/U1733C Electrical Specifications

Test Signal		Test signal level		Test frequency	
Model	Selection	Level	Accuracy	Frequency	Accuracy
U1731C/U1732C/U1733C	100 Hz	0.74 Vrms	0.05 Vrms	100 Hz	0.01%
	120 Hz	0.74 Vrms	0.05 Vrms	120.481 Hz	0.01%
	1 kHz	0.74 Vrms	0.05 Vrms	1 kHz	0.01%
U1732C/U1733C	10 kHz	0.70 Vrms	0.05 Vrms	10 kHz	0.01%
U1733C	100 kHz	0.70 Vrms	0.05 Vrms	100 kHz	0.01%
	DCR	+1.235 V	0.05 V	NA	NA

Source Impedance of Impedance/Resistance Measurement						
Range	Typical source impedance					
	100 Hz	120 Hz	1 kHz	10 kHz	100 kHz	DCR
2 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
20 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
200 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
2000 Ω	1 kΩ	1 kΩ	1 kΩ	1 kΩ	1 kΩ	1 kΩ
20 kΩ	10 kΩ	10 kΩ	10 kΩ	10 kΩ	1 kΩ	10 kΩ
200 kΩ	100 kΩ	100 kΩ	100 kΩ	10 kΩ	1 kΩ	100 kΩ
2000 kΩ	100 kΩ	100 kΩ	100 kΩ	10 kΩ	NA	100 kΩ
20 MΩ	100 kΩ	100 kΩ	100 kΩ	100 kΩ	NA	100 kΩ
200 MΩ	100 kΩ	100 kΩ	100 kΩ	NA	NA	100 kΩ

Source Impedance of Capacitance Measurement					
Range	Typical source impedance				
	100 Hz	120 Hz	1 kHz	10 kHz	100 kHz
20 mF	100 Ω	100 Ω	NA	NA	NA
2000 μF	100 Ω	100 Ω	100 Ω	NA	NA
200 μF	100 Ω	100 Ω	100 Ω	100 Ω	NA
20 μF	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
2000 nF	1 kΩ	1 kΩ	100 Ω	100 Ω	100 Ω
200 nF	10 kΩ	10 kΩ	1 kΩ	100 Ω	100 Ω
20 nF	100 kΩ	100 kΩ	10 kΩ	1 kΩ	100 Ω
2000 pF	100 kΩ	100 kΩ	100 kΩ	10 kΩ	1 kΩ
200 pF	NA	NA	100 kΩ	10 kΩ	1 kΩ
20 pF	NA	NA	NA	100 kΩ	1 kΩ

U1731C/U1732C/U1733C Electrical Specifications

Range	Typical source impedance				
	U1731C/U1732C/U1733C			U1732C/U1733C	U1733C
	100 Hz	120 Hz	1 kHz	10 kHz	100 kHz
20 μ H	NA	NA	NA	100 Ω	100 Ω
200 μ H	NA	NA	100 Ω	100 Ω	100 Ω
2000 μ H	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
20 mH	100 Ω	100 Ω	100 Ω	100 Ω	100 Ω
200 mH	100 Ω	100 Ω	100 Ω	1 k Ω	1 k Ω
2000 mH	100 Ω	100 Ω	1 k Ω	10 k Ω	1 k Ω
20 H	1 k Ω	1 k Ω	10 k Ω	10 k Ω	1 k Ω
200 H	10 k Ω	10 k Ω	100 k Ω	100 k Ω	NA
2000 H	100 k Ω	100 k Ω	100 k Ω	NA	NA

General Specifications

Parameter	U1731C	U1732C	U1733C
Measurements	Z/L/C/R/D/Q/θ/ESR	Z/L/C/R/D/Q/θ/ESR	Z/L/C/R/D/Q/θ/ESR/DCR
Display	Primary display: Maximum display 19,999 counts Secondary display: Maximum display 999 counts Automatic polarity indication		
Test frequency (Accuracy = ± 0.1% of actual test frequency)	100 Hz, 120 Hz, 1 kHz	100 Hz, 120 Hz, 1 kHz, 10 kHz	100 Hz, 120 Hz, 1 kHz, 10 kHz, 100 kHz
Backlight	No	Yes	Yes
Test signal level	Selection	Test signal level	Test frequency
	100 Hz	0.74 Vrms	100 Hz
	120 Hz	0.74 Vrms	120.481 Hz
	1 kHz	0.74 Vrms	1 kHz
	10 kHz ¹	0.74 Vrms	10 kHz
	100 kHz ²	0.74 Vrms	100 kHz
	DCR ²	+1.235 V	NA
Tolerance mode	1%, 5%, 10%, 20%		
Ranging mode	Auto and manual		
Measurement rate	1 time/second, nominal		
Response time	Approximately 1 second/DUT (Device Under Test)		
Auto power-off	~0-99 mins without operation		
Power supply	Single standard 9 V battery (alkaline or carbon-zinc) or optional power adaptor		
Power consumption	225 mVA maximum without backlight		
Input protection fuse	Resettable over-current protection		
Battery life	16 hours based on alkaline battery		
Low battery indicator	[] will appear when voltage drops below ~7.2 V		
Operating temperature	-10 to 55 °C, 0 to 80% R.H.		
Storage temperature	-20 to 70 °C, 0 to 80% R.H. without battery		
Temperature coefficient	0.1 × (specified accuracy)/°C (from -10 to 18 °C or 28 to 55 °C)		
Relative humidity	Maximum 80% R.H. for temperature up to 30 °C decreasing linearly to 50% R.H. at 55 °C		
Weight	337 grams with battery		
Dimensions (H x W x D)	184 mm x 87 mm x 41 mm		
Safety and EMC Compliance	In compliance with EN61010-1 (IEC61010-1:2001) for low voltage directive and Pollution Degree II Environment. Susceptibility and Emissions (EMC): Commercial Limits per EN61326-1		
Calibration	One-year calibration cycle recommended		
Warranty	<ul style="list-style-type: none"> • 3 years for main unit • 3 months for standard shipped accessories 		

1. Only applicable for U1732C/U1733C

2. Only applicable for U1733C

Ordering Information



Standard shipped items

Standard U1731C, U1732C, and U1733C ordering include:

- Quick Start Guide
- Certificate of Calibration (CoC)
- Alligator clip leads
- 9 V alkaline battery

Recommended accessories

U1731P



Combo Kit

Includes one U1731 Series handheld and four accessories:

- U5491A soft carrying case
- U1173A IR-USB cable
- U1780A AC adaptor
- U1782A SMD tweezer

U1732P



Combo Kit

Includes one U1732 Series handheld and four accessories:

- U5491A soft carrying case
- U1173A IR-USB cable
- U1780A AC adaptor
- U1782A SMD tweezer

U1733P



Combo Kit

Includes one U1733 Series handheld and four accessories:

- U5491A soft carrying case
- U1173A IR-USB cable
- U1780A AC adaptor
- U1782A SMD tweezer

U1174A



Soft carrying case

U5481A



IR-to-USB cable

U1782A



SMB tweezer

U1780A



Power adaptor and cord (according to country)

U1781A



Alligator clip leads

www.agilent.com

www.agilent.com/find/handheld-tools



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA® for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



<http://www.pxisa.org>

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

www.agilent.com/find/advantageservices



www.agilent.com/quality

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 9276201

For other unlisted Countries:

www.agilent.com/find/contactus

Revised: October 14, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011

Printed in USA, April 20, 2011

5990-7778EN



Agilent Technologies