



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933

(818) 701-4939 Fax:

MF200DU06FJ


Features

- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Popular SOT-227 Package


Applications

- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper
- Inversion Welder



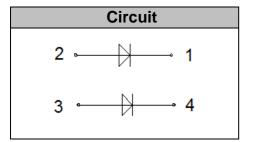

200 Amp FRED Modules 600 Volts

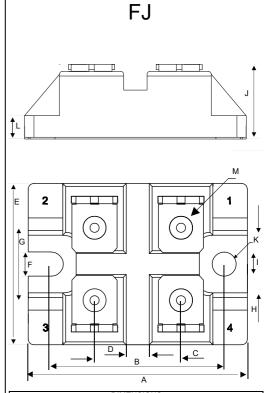

DIMENSIONS					
	INCHES		ММ		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	1.484	1.508	37.70	38.30	
В	1.169	1.193	29.70	30.30	
C	.579	.602	14.70	15.30	
D	.146	.169	3.70	4.30	
Е	1.091	1.114	27.70	28.30	
F	.154	.177	3.90	4.50	
G	.484	.508	12.30	12.90	
Н	.382	.406	9.70	10.30	
	.130	.154	3.30	3.90	
J	.492	.516	12.50	13.10	
K	.165		4.20		Ø
Ĺ	.146	.169	3.70	4.30	
М	.157		4.00		Ø



MF200DU06FJ

Maximum Ratings

Symbol	Conditions	Values	Units
V_{R}		600	V
V_{RRM}		600	V
	T _C =90°C, Per Leg	100	Α
$I_{F(AV)}$	T _C =90°C, Per Moudle	200	Α
	T _C =100°C, 20KHz, Per Moudle	150	Α
I _{F(RMS)}	T _C =90°C, Per Leg	150	Α
-	1/2 Cycle , 50Hz, Sine	1300	Α
I _{FSM}	1/2 Cycle , 60Hz, Sine	1500	Α
l ² t	T _J =45°C, t=10ms, 50Hz, Sine	8450	A ² s
1 (T _J =45°C, t=8.3ms, 60Hz, Sine	11250	A ² s
P_{D}	Tc=25°C	260	W
T_J		-40 to +150	°C
T_{STG}		-40 to +125	°C
Visol	3600V AC 1s	1	mA
Torque	To Sink Recommended (M4)	0.6~1.2	N·m
Torque	To Terminal Recommended (M4)	0.6~1	N·m
Weight		27	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	Per diode	0.3	°C/W

Electrical Characteristics

Symbol	Conditions	Values			Units
Symbol	Conditions		Тур.	Max.	Ullits
	V _R =600V			0.5	mA
I _{RM}	V _R =600V, T _J =125°C			1	mA
V _F	I _F =100A		1.2	1.3	V
	I _F =100A, T _J =125°C		1.1	1.2	V
trr	I_F =1A, V_R =30V, di_F/dt =-400A/ μ s		42	50	ns
trr	\/ -200\/ L -100A di /dt- 200A///2 T -25°C		105		ns
I _{RRM}	V_R =300V, I_F =100A, di_F/dt =-200A/ μ s, T_J =25°C		10		Α
trr	V _R =300V, I _F =100A, di _F /dt=-200A/μs, T _J =125°C		200		ns
I _{RRM}			18		Α



Performance Curves

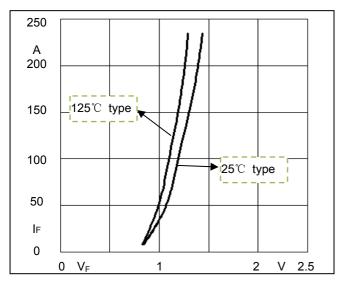


Fig1. Forward Voltage Drop vs Forward Current

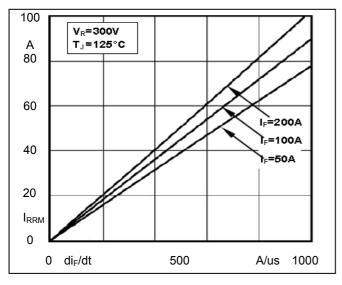


Fig3. Reverse Recovery Current vs di_F/dt

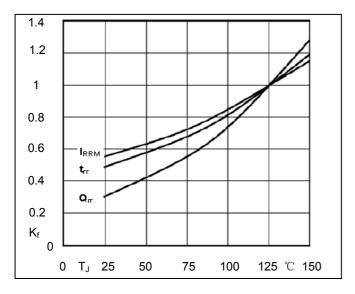


Fig5. Dynamic Parameters vs Junction Temprature

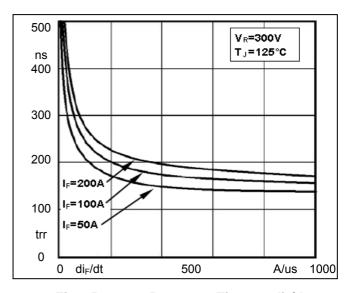


Fig2. Reverse Recovery Time vs di_F/dt

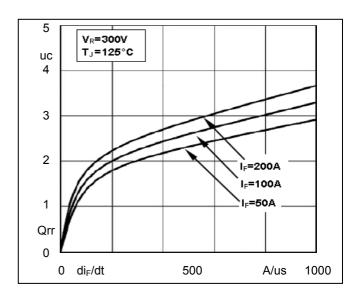


Fig4. Reverse Recovery Charge vs di_F/dt

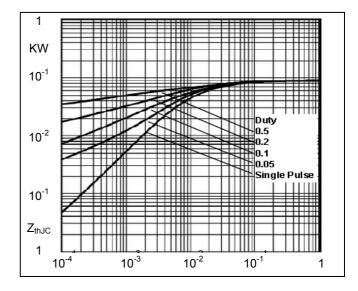


Fig6. Transient Thermal Impedance



Ordering Information:

Device	Packing
Part Number-BP	Bulk: 125pcs/Carton

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.