



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

1F1  
THRU  
1F7

**TECHNICAL SPECIFICATIONS OF MINIATURE FAST RECOVERY RECTIFIER**  
**VOLTAGE RANGE - 50 to 1000 Volts**

**CURRENT - 1.0 Ampere**

**FEATURES**

- \* Fast switching
- \* Low leakage
- \* High current capability
- \* High current surge
- \* High reliability

**MECHANICAL DATA**

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: MIL-STD-202E, Method 208 guaranteed
- \* Mounting position: Any
- \* Weight: 0.19 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**


Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



R-1

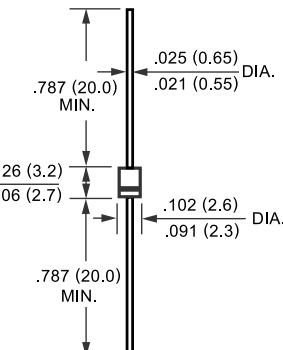

Dimensions in inches and (millimeters)

	SYMBOL	1F1	1F2	1F3	1F4	1F5	1F6	1F7	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 25°C	I <sub>o</sub>				1.0				Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>				30				Amps
Maximum Instantaneous Forward Voltage at 0.5A DC	V <sub>F</sub>				1.3				Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage TA = 25°C	I <sub>R</sub>				5.0				uAmps
Maximum Full Load Reverse Current Full Cycle Average, .375" (9.5mm) lead length at T <sub>L</sub> = 55°C					500				
Maximum Reverse Recovery Time (Note 1)	t <sub>rr</sub>		150		250		500		nSec
Typical Junction Capacitance (Note 2)	C <sub>J</sub>			15					pF
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>				-65 to + 150				°C

NOTES : 1. Reverse Recovery Test Conditions: IF = 0.5A, IR = 1.0A, IRR = 0.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts

# RATING AND CHARACTERISTIC CURVES ( 1F1 THRU 1F7 )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

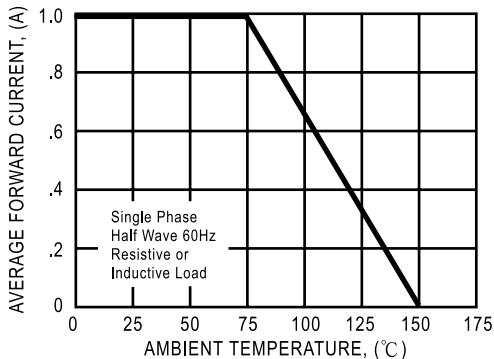


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

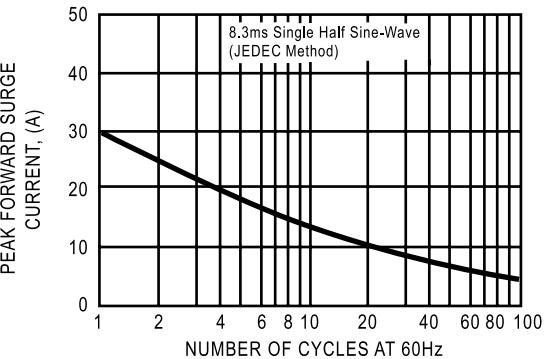


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

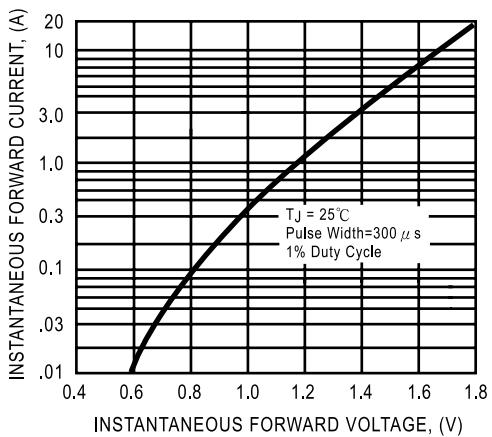


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

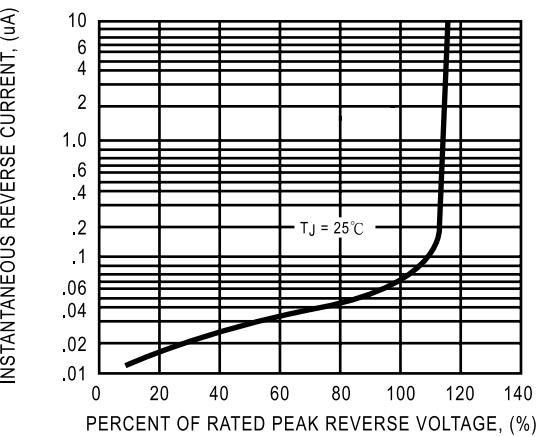


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


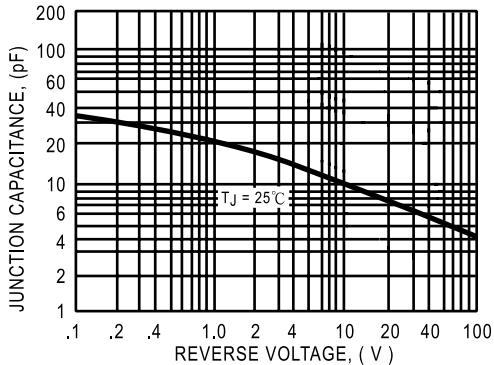


FIG. 6 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

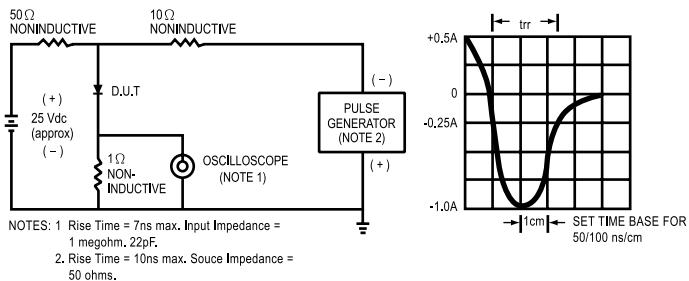

**DC COMPONENTS CO., LTD.**