



# SJR687M010

SURFACE MOUNT

Parts are RoHS compliant

Date code when parts became RoHS: 17

## ELECTRICAL SPECIFICATIONS

Capacitance: 680 uF

Dissipation Factor: 0.26 Max at 120 Hz and 20°C

Temperature Range: -40°C to +125°C

ESR: 0.51 Ohms Max at 20°C and 120 Hz

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 10 Volts DC

SVDC: 13 Volts DC

Ripple Current: 180 mA at 100 kHz and 105°C

Impedance Ratios:-40°C/20°C 2 and -55°C/20°C - 3

Leakage Current: .01CV or 3uA, whichever is greater uA after 2 Minutes

Load Life: 2000 hours at 125°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: ≤30% of initial measured value

Dissipation Factor: ≤300% of maximum specified value

Leakage Current: ≤100% of maximum specified value

### Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.35	0.5	0.64	0.83	1	1

### Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

## PHYSICAL DIMENSIONS

Diameter (D): 10 mm + 0.5 mm


Length (L): 10.2 mm + 0.3 mm

Lead Spacing (S): 4.6 mm +/- 0.2 mm

Lead Wire Diameter (d): 0.9 mm +/- 0.2 mm

Lead Length: 3.5 mm +/- 0.2 mm

Lead Finish: Matte Tin

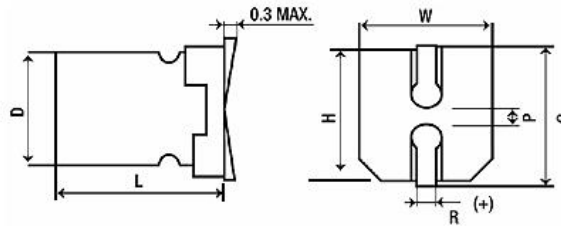

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850  
 Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.illcap.com.hk](http://www.illcap.com.hk)  
 © Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier, All Rights Reserved