

Voltage Controlled Oscillator

ROS-1600W+

Wide Band 800 to 1600 MHz

Features

- high power output, +9 dBm typ.
- low phase noise
- low pushing
- aqueous washable

Applications

- R & D
- lab
- instrumentation
- test equipment



CASE STYLE: CK605

PRICE: \$19.95 ea. QTY (5-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER					
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)		SENSI- TIVITY (MHz/V)	PORT CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Typ.	Max.	Typ.	Max.	Vcc (volts)	Current (mA)
									Min.	Max.													
ROS-1600W+	800	1600	+9	-72	-99	-122	-143	0.5	24	35-58	210	90	-90	-22	-15	10	0.3	11.5	35				

Pin Connections

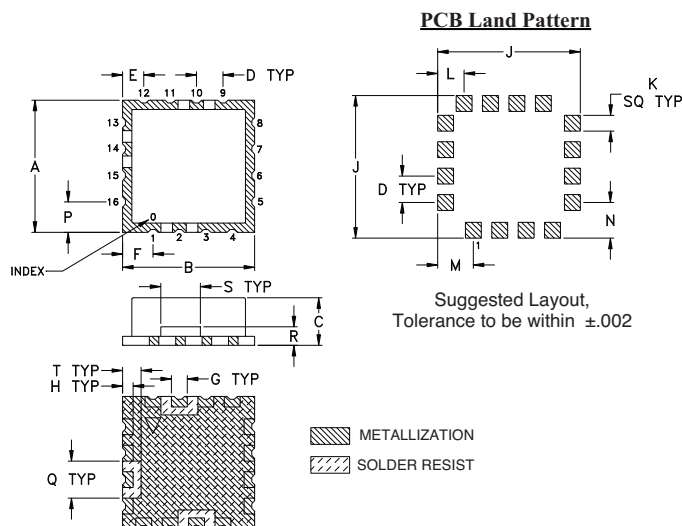
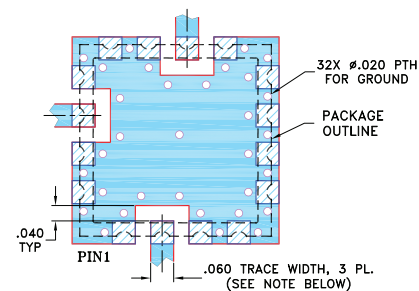
RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	12V
Absolute Max. Tuning Voltage (Vtune)	24V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

Demo Board MCL P/N: TB-10
Suggested PCB Layout (PL-012)

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

Performance Data & Curves*

ROS-1600W+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1200 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	74.62	645.6	627.3	607.1	9.80	9.48	9.27	25.79	-36.7	-26.1	-35.5	0.19	9.36	-70.9	-93.9	-114.2	-134.1	1.0	-70.60
0.50	65.03	681.8	664.6	646.9	9.82	9.44	9.20	25.80	-42.4	-25.9	-35.9	0.24	14.26	-71.2	-95.0	-115.5	-135.5	2.0	-80.36
1.00	57.95	713.0	697.1	680.3	9.72	9.38	9.15	25.82	-37.8	-25.2	-36.2	0.28	9.86	-73.3	-95.6	-116.3	-136.2	3.5	-87.03
2.00	51.19	768.0	752.8	737.4	9.71	9.37	8.92	25.85	-30.7	-24.4	-39.3	0.28	7.48	-73.6	-97.5	-117.7	-138.1	6.0	-92.78
3.00	49.54	818.7	803.6	788.2	9.81	9.32	8.90	25.88	-28.1	-24.4	-44.6	0.31	4.04	-74.0	-98.0	-118.7	-138.5	8.5	-96.22
4.00	48.56	868.3	853.0	837.9	9.85	9.34	8.91	25.92	-26.4	-24.4	-48.5	0.29	8.63	-73.0	-98.8	-119.4	-139.6	10.0	-98.19
5.00	49.33	917.5	901.6	886.4	9.84	9.39	8.88	25.97	-24.2	-24.4	-49.8	0.26	11.82	-75.0	-100.0	-120.2	-140.1	20.8	-105.38
6.00	50.53	967.4	951.1	935.6	10.03	9.43	8.85	26.03	-22.4	-24.4	-48.5	0.25	6.96	-73.7	-100.5	-121.0	-141.3	35.5	-112.36
7.00	53.68	1019.3	1002.3	986.5	10.16	9.46	8.95	26.09	-21.5	-25.8	-46.1	0.26	4.60	-71.8	-98.9	-121.2	-141.6	60.7	-116.90
8.00	56.17	1073.6	1056.0	1039.9	10.03	9.52	8.93	26.17	-21.0	-28.9	-43.2	0.31	11.82	-72.3	-99.5	-122.1	-142.7	86.7	-120.92
10.00	58.16	1188.8	1170.3	1154.1	10.18	9.35	8.82	26.32	-20.7	-34.6	-39.1	0.22	4.90	-69.6	-97.9	-122.2	-143.5	100.0	-122.01
12.00	52.65	1300.1	1282.7	1267.6	9.94	9.07	8.32	26.40	-20.6	-32.4	-38.2	0.16	4.98	-69.3	-97.5	-122.1	-144.2	148.1	-126.40
13.00	49.39	1350.5	1334.4	1320.5	9.77	8.82	8.29	26.40	-21.0	-31.3	-42.1	0.27	4.15	-69.9	-98.1	-122.4	-144.4	211.6	-129.53
15.00	43.16	1443.5	1429.0	1416.2	8.99	8.26	7.55	26.37	-21.4	-30.8	-41.1	0.28	6.53	-71.1	-98.8	-122.9	-145.2	361.5	-134.62
16.00	41.89	1486.4	1472.0	1459.5	8.89	7.96	7.38	26.33	-21.8	-30.5	-43.1	0.25	6.92	-72.2	-98.9	-123.3	-145.3	432.2	-136.57
18.00	37.87	1565.8	1551.9	1539.7	8.21	7.46	6.95	26.26	-22.7	-30.0	-46.7	0.17	6.33	-75.3	-100.1	-123.6	-144.8	507.5	-137.73
19.00	35.22	1602.7	1589.3	1577.1	7.95	7.33	6.71	26.23	-24.3	-29.9	-48.1	0.11	6.85	-72.2	-99.8	-123.2	-145.2	600.0	-139.22
21.00	30.75	1669.7	1656.2	1644.3	7.61	6.79	6.47	26.19	-27.0	-30.0	-47.1	0.04	7.26	-71.6	-99.6	-123.3	-144.6	712.4	-140.72
22.00	29.05	1699.9	1686.7	1674.6	7.27	6.59	6.34	26.16	-28.2	-30.2	-46.4	0.01	8.49	-72.4	-100.3	-123.5	-144.4	851.6	-142.39
24.00	25.85	1754.6	1741.4	1729.6	6.76	6.30	5.75	26.13	-30.2	-32.3	-47.6	0.02	8.26	-74.2	-101.0	-123.5	-144.2	1000.0	-143.61

*at 25°C unless mentioned otherwise

