

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1050171001](#)
Status: **Active**
Overview: [USB Products and Solutions](#)
Description: Micro-USB B Receptacle, Bottom Mount, Surface Mount, Lead-Free

Documents:

[3D Model](#) [Packaging Specification PK-105017-001-000 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-105017-001-001 \(PDF\)](#)

Agency Certification

UL E107635

General


Product Family I/O Connectors
Series [105017](#)
Application Wire-to-Board
Comments Signal contacts 1.0A, Power contacts 1.8A
Component Type Receptacle
Overview [USB Products and Solutions](#)
Product Name USB 2.0
Type Micro-B
UPC 884982346024

Physical

Boot Color N/A
Circuits (Loaded) 5
Circuits (maximum) 5
Color - Resin Black
Durability (mating cycles max) 10000
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part No
Material - Metal Copper Alloy
Material - Plating Mating Gold
Material - Plating Termination Gold
Material - Resin High Temperature Thermoplastic
Net Weight 0.237/g
Number of Rows 1
Orientation Right Angle
PCB Retention None
Packaging Type Embossed Tape on Reel
Panel Mount No
Pitch - Mating Interface 0.65mm
Pitch - Termination Interface 0.65mm
Polarized to Mating Part Yes
Ports 1
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -30° to +85°C
Termination Interface: Style Surface Mount
Waterproof / Dustproof No

Electrical

Current - Maximum per Contact 1.8A, 1.0A
Grounding to Panel Yes
Shield Type Full Shield

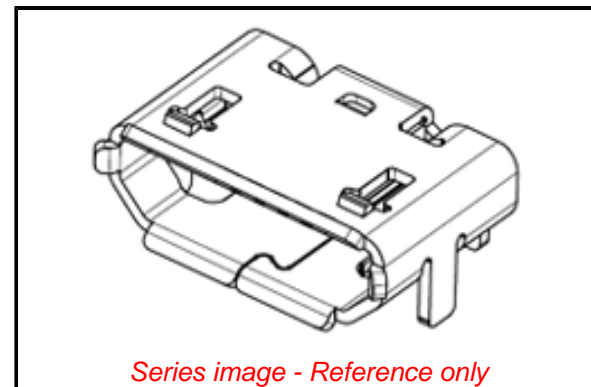

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[105017 Series](#)

Shielded	Yes
Voltage - Maximum	30V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	003
Lead-free Process Capability	N/A
Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	255

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-105017-001-000
Product Specification	PS-105017-001-001
Sales Drawing	SD-105017-001-000

This document was generated on 10/31/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION