

Silicon PNP Power Transistor

2SB925

DESCRIPTION



- High Collector Current: $I_C = -7A$
- Low Collector Saturation Voltage
 $V_{CE(sat)} = -0.6V(\text{Max}) @ I_C = -5A$
- High Speed Switching

APPLICATIONS

- Designed for low voltage switching applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-20	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-7	A
I_{CM}	Collector Current-Peak	-12	A
P_C	Total Power Dissipation @ $T_C=25^\circ\text{C}$	30	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

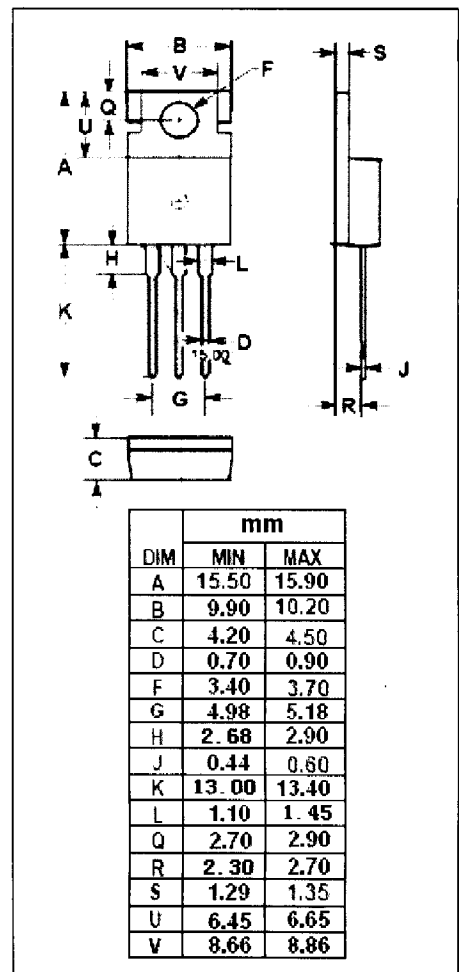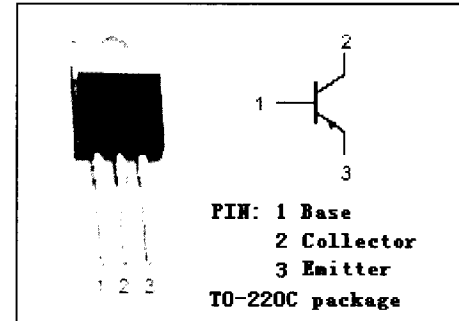

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon PNP Power Transistor

2SB925

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -10\text{mA}; I_B = 0$	-20			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.16\text{A}$			-0.6	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.16\text{A}$			-1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -40\text{V}; I_E = 0$			-50	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5\text{V}; I_C = 0$			-50	μA
h_{FE-1}	DC Current Gain	$I_C = -0.1\text{A}; V_{CE} = -2\text{V}$	45			
h_{FE-2}	DC Current Gain	$I_C = -2\text{A}; V_{CE} = -2\text{V}$	60		260	
C_{OB}	Collector Output Capacitance	$I_E = 0; V_{CB} = -10\text{V}; f = 1\text{MHz}$		140		pF
f_T	Current-Gain—Bandwidth Product	$I_C = -0.5\text{A}; V_{CE} = -10\text{V}$		150		MHz

◆ h_{FE-2} Classifications

R	Q	P
60-120	90-180	130-260