

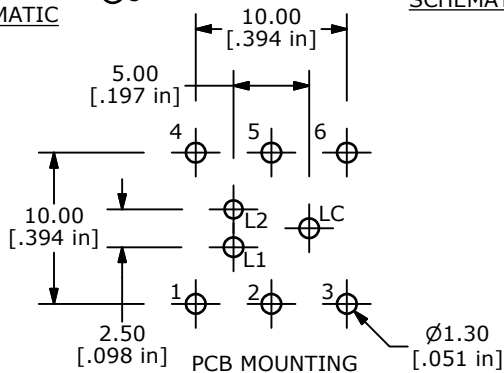



ISOMETRIC

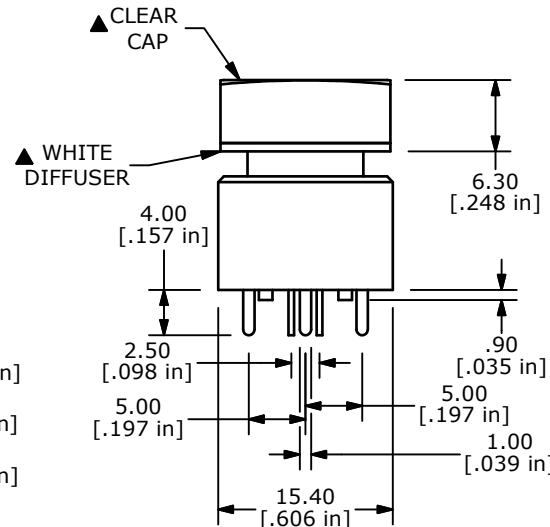

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT RATING: 0.4VA MAX. @ 28 V (AC OR DC)
5. CONTACT MATERIAL: GOLD
6. ELECTRICAL LIFE: 200,000 Typical
7. MECHANICAL LIFE:  
1,000,000 CYCLES TYP.
8. OPERATING TEMP: -20°C TO +70°C
9. OPERATING FORCE: 300 ± 150 gf
10. CONTACT RESISTANCE:  
100 MILLI-OHM INITIAL TYP. MAX.
11. INSULATION RESISTANCE:  
500VDC, 100 MΩ MIN.
12. DIELECTRIC STRENGTH:  
1000 VAC FOR 1 MINUTE
13. TRAVEL TO MAKE: 2.20mm ± 0.2
14. 2002/95/EC (ROHS) COMPLIANT
15. ▲ DENOTES CRITICAL PARAMETER
- ▲ 16. LED COLOR: WHITE: 1 CHIP; 3.4VDC, @20mA TYP.  
RED: 3 CHIPS; 1.7VDC, @20mA TYP.

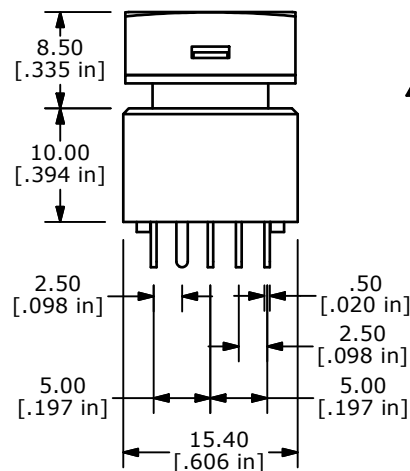

<b>E-SWITCH®</b>				
TITLE ULP22EEP1RSSCL1WHTRED				
SCALE	DATE	DR	DWG	REV
1.5:1	4/24/2009	BF	B800028	C

C	19737	CORRECT TERMINALS	03/07/11	BMA
B	19724	UPDATE DRAWING	03/01/11	BMA
REV	PCR NO	DESCRIPTION	DATE	BY
<small>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</small>				