



Features

- Industry's lowest internal resistance
- Switches at optimum temperature
- Axial leaded, with flexible design options available
- Fully compatible with current industry standards
- Weldable nickel terminals

■ RoHS compliant*

MF-SVS Series - PTC Resettable Fuses

Electrical Characteristics

Model	V max. Volts	I max. Amps	I _{hold}	I _{trip}	Initial Resistance			1 Hour (R ₁) Post-Trip Resistance	Max. Time To Trip		Tripped Power Dissipation
			Amperes at 23 °C		Ohms at 23 °C			Ohms at 23 °C	Amperes at 23 °C	Seconds at 23 °C	Watts at 23 °C
			Hold	Trip	Min.	Max.	Typ.	Max.			Typ.
MF-SVS170	10	100	1.7	4.1	0.018	0.032	0.023	0.064	8.5	5.0	2.1
MF-SVS175	10	100	1.75	4.2	0.017	0.031	0.022	0.063	8.5	5.0	2.1
MF-SVS210	10	100	2.1	5.0	0.010	0.020	0.016	0.040	10.5	5.0	2.4
MF-SVS230	10	100	2.3	5.2	0.010	0.018	0.014	0.036	12.5	5.0	2.6

Environmental Characteristics

Operating/Storage Temperature	-40 °C to +85 °C
Maximum Device Surface Temperature in Tripped State	125 °C
Passive Aging	+60 °C, 1000 hours±10 % typical resistance change
Humidity Aging	+60 °C, 85 % R.H. 1000 hours.....±10 % typical resistance change
Thermal Shock	MIL-STD-202F, Method 107G,±5 % typical resistance change +85 °C to -40 °C, 10 times
Vibration	MIL-STD-883C,No change Condition A

Test Procedures And Requirements For Model MF-SVS Series

Test	Test Conditions	Accept/Reject Criteria
Visual/Mech.	Verify dimensions and materials	Per MF physical description
Resistance	In still air @ 23 °C	R _{min} ≤ R ≤ R _{max}
Time to Trip	At specified current, V _{max} , 23 °C	T ≤ max. time to trip (seconds)
Hold Current	30 min. at I _{hold}	No trip
Trip Cycle Life	V _{max} , I _{max} , 100 cycles	No arcing or burning
Trip Endurance	V _{max} , 48 hours	No arcing or burning

UL File Number	E 174545S
CSA File Number	CA 110338
TÜV File Number	R2057213

Thermal Derating Chart - I_{hold} (Amps)

Model	Ambient Operating Temperature			
	0 °C	23 °C	60 °C	80 °C
MF-SVS170	2.2	1.7	1.3	0.8
MF-SVS175	2.25	1.75	1.35	0.8
MF-SVS210	2.9	2.1	1.5	0.8
MF-SVS230	3.1	2.3	1.65	0.8

I_{trip} is approximately two times I_{hold}.

Applications

- Any battery pack application that requires protection with the lowest possible resistance:
 - Rechargeable battery packs; designed for NiMH and Li-Ion chemical characteristics
 - Cellular / cordless phone rechargeable battery packs
 - Laptop computer battery packs

MF-SVS Series - PTC Resettable Fuses

BOURNS®

Product Dimensions

Model	A		B		C		D		F	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
MF-SVS170	$\frac{16.0}{(0.630)}$	$\frac{18.0}{(0.709)}$	$\frac{4.9}{(0.193)}$	$\frac{5.5}{(0.216)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{3.9}{(0.154)}$	$\frac{4.1}{(0.161)}$
MF-SVS170N	$\frac{22.0}{(0.866)}$	$\frac{24.0}{(0.945)}$	$\frac{3.6}{(0.142)}$	$\frac{3.9}{(0.153)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{2.4}{(0.094)}$	$\frac{2.6}{(0.102)}$
MF-SVS175	$\frac{16.0}{(0.630)}$	$\frac{18.0}{(0.709)}$	$\frac{4.9}{(0.193)}$	$\frac{5.5}{(0.216)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{3.9}{(0.154)}$	$\frac{4.1}{(0.161)}$
MF-SVS175N	$\frac{22.0}{(0.866)}$	$\frac{24.0}{(0.945)}$	$\frac{3.6}{(0.142)}$	$\frac{3.9}{(0.153)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{2.4}{(0.094)}$	$\frac{2.6}{(0.102)}$
MF-SVS175NL	$\frac{26.0}{(1.024)}$	$\frac{28.0}{(1.102)}$	$\frac{3.6}{(0.142)}$	$\frac{3.9}{(0.153)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{6.1}{(0.240)}$	$\frac{7.8}{(0.307)}$	$\frac{2.4}{(0.094)}$	$\frac{2.6}{(0.102)}$
MF-SVS210	$\frac{20.9}{(0.823)}$	$\frac{23.1}{(0.909)}$	$\frac{4.9}{(0.193)}$	$\frac{5.5}{(0.216)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{3.9}{(0.154)}$	$\frac{4.1}{(0.161)}$
MF-SVS210N	$\frac{30.0}{(1.181)}$	$\frac{32.0}{(1.260)}$	$\frac{3.6}{(0.142)}$	$\frac{3.9}{(0.153)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{2.4}{(0.094)}$	$\frac{2.6}{(0.102)}$
MF-SVS230	$\frac{20.9}{(0.823)}$	$\frac{23.1}{(0.909)}$	$\frac{4.9}{(0.193)}$	$\frac{5.5}{(0.216)}$	$\frac{0.6}{(0.024)}$	$\frac{0.9}{(0.035)}$	$\frac{4.1}{(0.161)}$	$\frac{5.8}{(0.228)}$	$\frac{3.9}{(0.154)}$	$\frac{4.1}{(0.161)}$


Packaging: Bulk - 500 pcs. per bag. Tape and Reel - Consult factory.

Leads: 1/4 Hardened Nickel 0.125 mm (.005 ") nom.


DIMENSIONS = $\frac{\text{MM}}{\text{(INCHES)}}$

NOTE: All "S" style models available with 1 or 2 slots. The dimensions and shape of the leads can be modified to suit the battery pack design. All models are available without insulation wrapping.


Standard Style

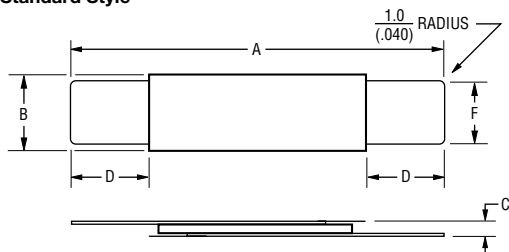

"S" Style

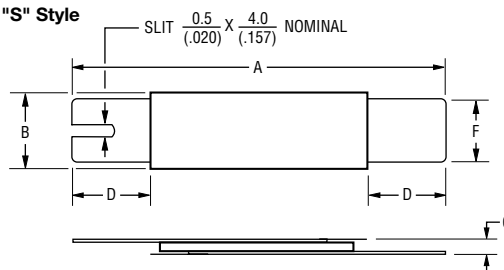


"SS" Style

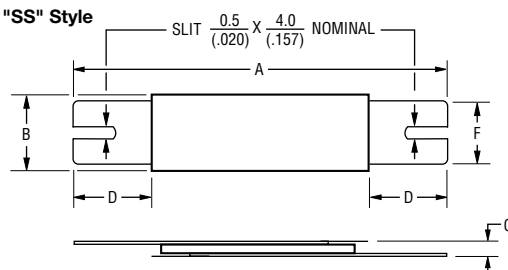

MF-SVS Series - PTC Resettable Fuses



Typical Time to Trip at 23 °C

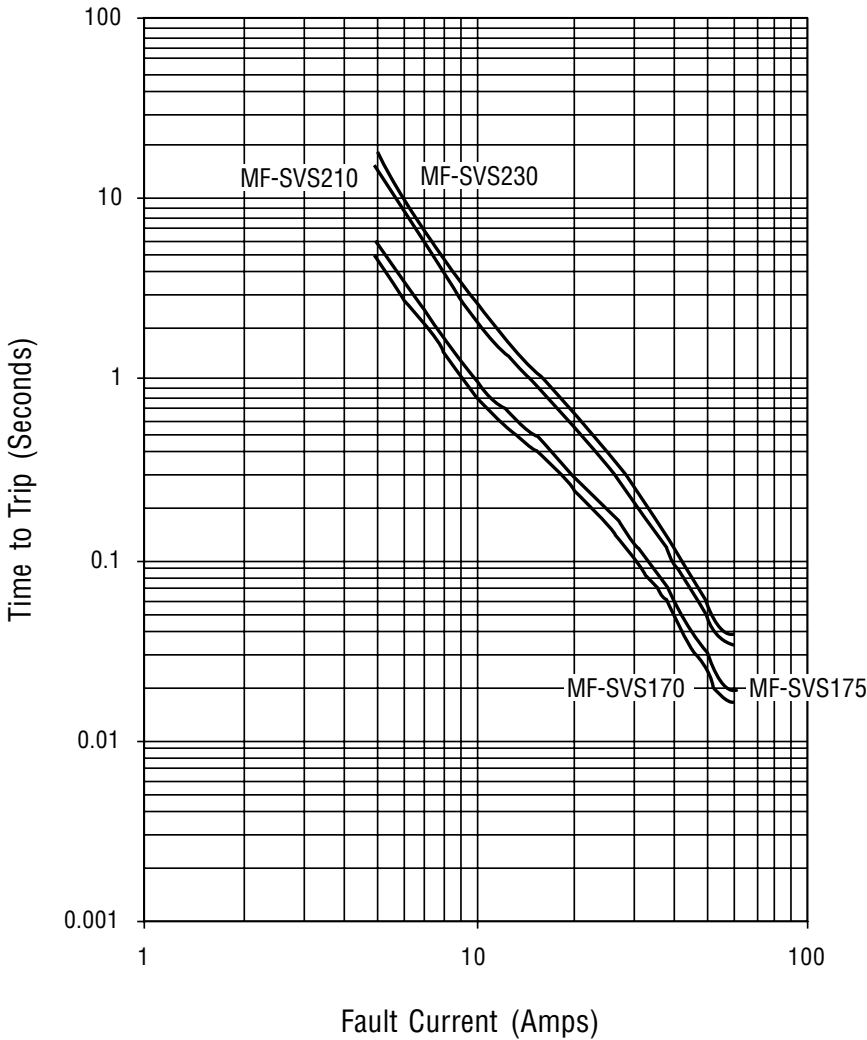

How To Order

MF - SVS 210 -

Multifuse®
Product
Designator

Series

SVS = Axial Leaded
"Strap" Component

Hold Current, I_{hold}
170-230 (1.70 - 2.30 Amps)

Narrow Device Option
N = Narrow (3.6mm)

Lead Option
S = Slotted Lead Option (one side)
SS = Slotted Lead Option (two sides)

Longer Lead Option
L = Longer Leads

Insulating Option
U = Non-Insulated Option

Packaging Option
-0 = Bulk Packaging
-2 = Tape and Reel* (Consult factory)

*Packaged per EIA 486-B

Typical Part Marking

Represents total content. Layout may vary.

