



APPLIED CONCEPTS INC.

397 Route 281 - P.O. BOX 1175
Tully, New York 13159-1175
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC2-12-1490

PRODUCT OVERVIEW SHEET - PAGE 1 OF 2

CCFL INVERTER (For Multiple Tube Applications)

3/8/05

GENERAL DESCRIPTION

The AC2-12-1490 is designed to power 4 CCFL's to a nominal power level of 13.8 watts.


The AC2-12-1490 features analog dimming control via a dc control level of +2.5V(off) to 0V(full-on) @ pin 6 of CON1. A dc reference voltage(+5V) is available @ pin 7 of CON1 for external use.

Enable control (+5V=off, 0V=on) is accomplished @ pin 5 of CON1.

All outputs are open and short circuit protected.

MECHANICAL / ENVIRONMENTAL


Weight = 28.4 grams
Altitude = 10,000 Ft maximum
Humidity < 85% non-condensing
Size (L x W x H) = 4.7 IN x 0.9 IN x 0.575 IN
PCB thickness = 0.062 IN
Mounting Holes = 0.128 IN diameter (X2)
Input Power & Control Connector = CON1
CCFL Output Connector = CON2

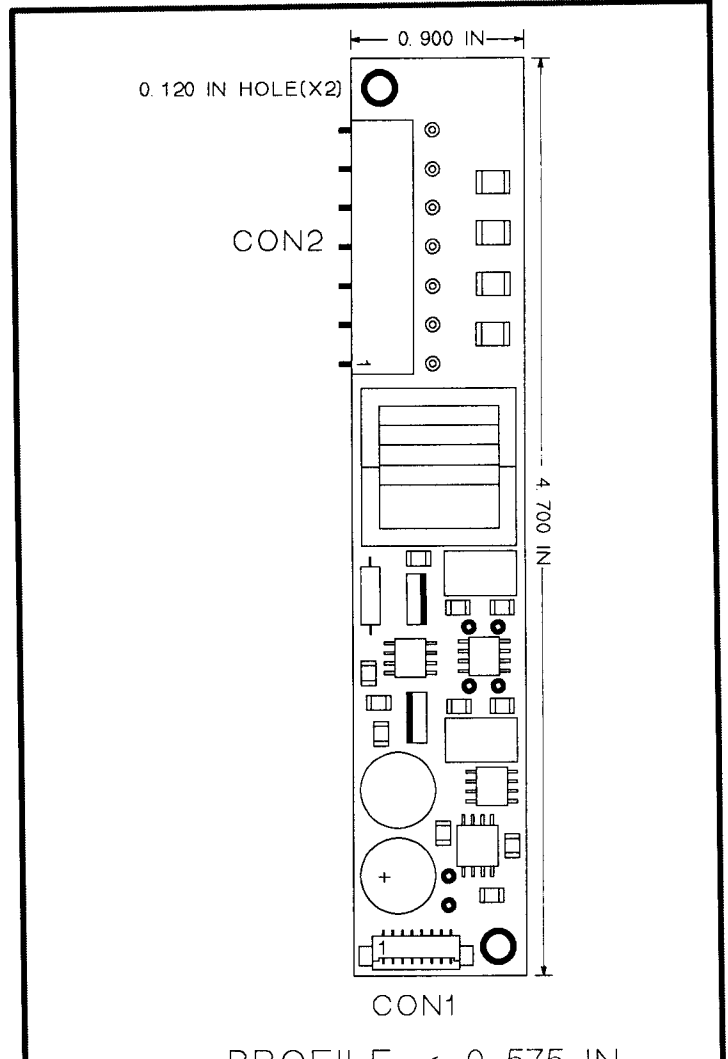

INPUT CONNECTOR
CON1
MOLEX 53261-0890

OUTPUT CONNECTOR
CON2
MOLEX 22-28-1130

PIN #	FUNCTION	PIN #	FUNCTION
1	+12V(PWR)	1	CCFL COMMON
2	+12V(PWR)	2	NC
3	GND(PWR)	3	CCFL4
4	GND(PWR)	4	NC
5	ENABLE	5	CCFL3
6	VCNTL	6	NC
7	LOGIC HI	7	CCFL2
8	PWM OUT	8	NC
		9	CCFL1
		10	NC
		11	NC
		12	NC
		13	NC



APPLIED CONCEPTS INC.

397 Route 281 - P.O. BOX 1175
Tully, New York 13159-1175
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC2-12-1490

PRODUCT OVERVIEW SHEET - PAGE 2 OF 2

MAXIMUM RATINGS*

3/8/05

Symbol	Parameter	Value	Unit
Vin	Supply Voltage (Referenced to Ground)	-0.7 to 14	Vdc
Vip	Voltage applied to any Input Pin (Referenced to Ground)	-0.7 to 5.7	Vdc
Iop	Current sourced or sinked from any Output Pin	+/- 10	mAdc
Pin	Input Power (DC Input Voltage x DC Input Current)	18	W
Top	Operating Temperature (Still air ambient around Inverter)	0 to +70	DegC
Tstg	Storage Temperature	-20 to +105	DegC

* Maximum Ratings are those values beyond which damage to the inverter may occur

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
Vin	Supply Voltage (Referenced to Ground)	10.8	13.2	Vdc
Lsv	Cold Cathode Fluorescent Lamp Sustaining Voltage	450	650	Vrms
Vcntl	Intensity Control Voltage	0	2.5	Vdc

ELECTRICAL CHARACTERISTICS

Vin = +12V, Lsv = 530Vrms, Vcntl = 0V, ENon = 0V unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Max	Unit
Lstart	Lamp Starting Voltage		1600		Vrms
Lout	Lamp Output Current	PWM Duty Cycle @ 100%	5.9	6.6	mArms
Lfreq	Lamp-Current Frequency		54	66	Khz
Pfreq	PWM Dimming Frequency	Vcntl (Pin 6) = +1.25V	95	101	Hz
Pdc	PWM Duty Cycle Range	Vcntl (Pin 6) = +2.5 to 0V	0	100	%
ENoff	Enable Control, unit OFF (Pin 5)		3.5	5.0	Vdc
ENon	Enable Control, unit ON (Pin 5)		0	0.7	Vdc
+5Vout	+5V Reference Out (Pin 7)	10k load to ground	4.6	5.3	Vdc
Iin	Input Current Draw			1.3	Adc
Eff	Electrical Efficiency		90		%