


CTDD1907SF-TU3K-1 Series

Fixed Input Isolated & Unregulated
1W Output, Twin Independent Output

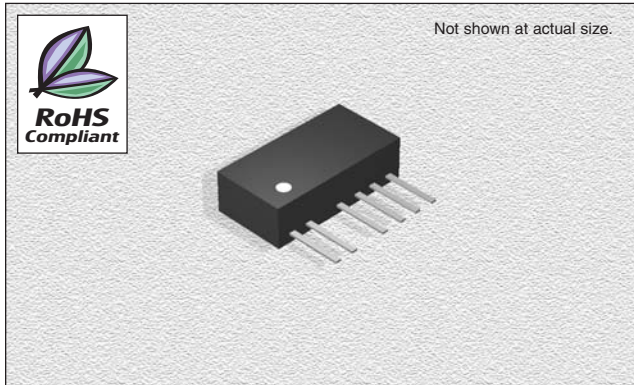

FEATURES

- Efficiency:** To 80%
- Temperature Range:** -40°C to +85°C
- Isolation:** 3KVDC
- Package:** UL94-V0
- Miscellaneous:** No heat sink required. No external components required. Industry standard pinout. Miniature SIP package. Twin Output Voltage. PCB Mounting. Optimized Volume Custom service available.
- Samples available.**

CHARACTERISTICS

- Short Circuit Protection:** 1 second
- Temperature Rise at Full Load:** 25°C Max. 15°C Typ.
- Cooling:** Free air convection
- No Load, Power Consumption:** 10% nominal power (typical)
- Operating Temperature Range:** -40°C to +85°C
- Storage Temperature Range:** -55°C to +125°C
- Lead Temperature:** 300°C (1.5mm from case for 10 seconds)
- Storage Humidity Range:** ≤ 95%
- Case Material:** Plastic (UL94-V0)
- MTBF:** >3,500,000 hours
- Miscellaneous:** RoHS Compliant.

SPECIFICATIONS

Part Number	Vin Nom. (VDC)	Input Range (VDC)	Vo1,Vo2 (VDC)	Io1 Max. (mA)	Io2 Min. (mA)	Effi. Typ. (%)
CTDD1907SF-0505-TU3K-1	5	4.5-5.5	5	100	10	72
CTDD1907SF-0509-TU3K-1	5	4.5-5.5	9	56	6	75
CTDD1907SF-0512-TU3K-1	5	4.5-5.5	12	42	4	78
CTDD1907SF-0515-TU3K-1	5	4.5-5.5	15	33	3	78
CTDD1907SF-1205-TU3K-1	12	10.8-13.2	5	100	10	74
CTDD1907SF-1209-TU3K-1	12	10.8-13.2	9	56	6	75
CTDD1907SF-1212-TU3K-1	12	10.8-13.2	12	42	4	79
CTDD1907SF-1215-TU3K-1	12	10.8-13.2	15	33	3	79
CTDD1907SF-2405-TU3K-1	24	21.6-26.4	5	100	10	74
CTDD1907SF-2409-TU3K-1	24	21.6-26.4	9	56	6	76
CTDD1907SF-2412-TU3K-1	24	21.6-26.4	12	42	4	79
CTDD1907SF-2415-TU3K-1	24	21.6-26.4	15	33	3	80

ISOLATION SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Isolation Voltage(Vin/Vout)	Tested for 1 minute	3000			VDC
Isolation Voltage(Vo1/Vo2)	Tested for 1 minute	3000			VDC
Isolation Resistance(Vin/Vout)	Test at 500VDC	1000			MΩ
Isolation Resistance(Vo1/Vo2)	Test at 500VDC	1000			MΩ


OUTPUT SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Output Power		0.1		1	W
Line regulation	For Vin change of 1%			1.2	%
Load regulation	10% to 100% full load			15	%
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Output ripple	20MHz Bandwidth		75	150	mVp-p
Switching frequency	Full load, nominal input		100		KHz

Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output unless otherwise specified.

TYPICAL CHARACTERISTICS

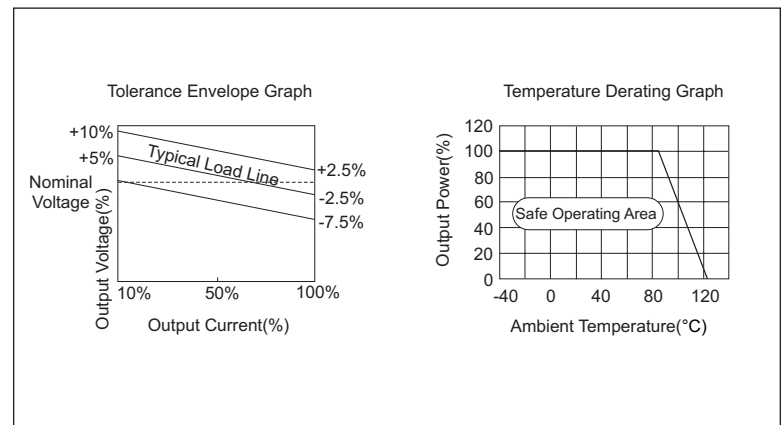


11.17.06

CTDD1907SF-TU3K-1 Series


Fixed Input Isolated & Unregulated
1W Output, Twin Independent Output

OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

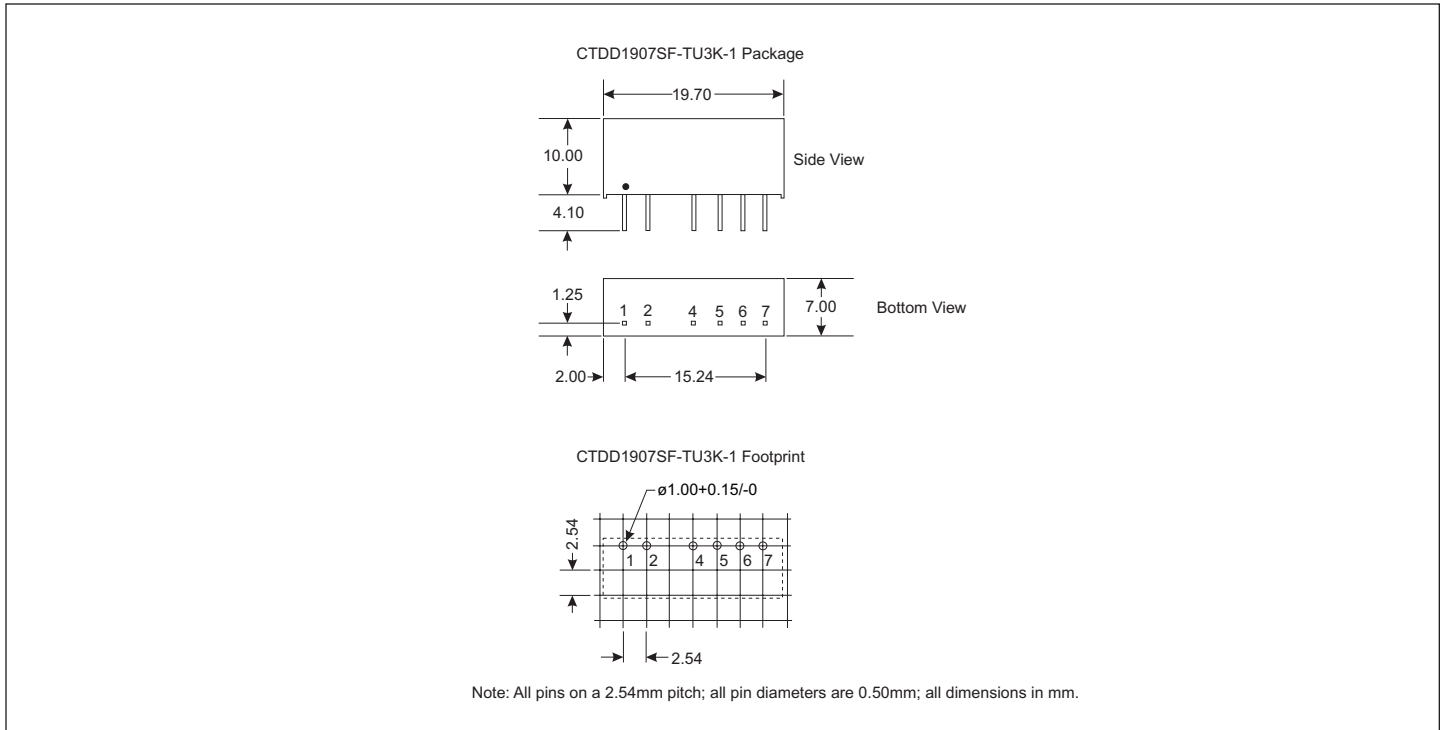

PIN CONNECTIONS

Pin	Function
1	Vin
2	GND
4	0V1
5	+Vo1
6	0V2
7	+V02



11.17.06