

25 Watts

AEV

Total Power: 25 Watts
Input Voltages: 24V or 48V
No. of Outputs: Single, Dual



Special Features

- Ideal for telecom/networking applications
- Standard Pinout - Low Profile
- Unencapsulated 2.0" x 2.5" x 0.33" package.
- 90°C Baseplate temperature
- Enable (on/off)
- 330kHz Switching frequency
- Under voltage lockout, OVP, OCP

Environmental

Operation case temperature range: -25°C to +90°C
 Storage temperature: -40°C to +105°C
 MTBF > 2 Million Hours (Bellcore TR332)

Safety

UL UL1950
CAN CAN22.2-950
TUV EN60950
CE CE Mark

Electrical Specs

Input

Input range	18-36 Vdc (24 Vdc nominal) 36 - 72Vdc (48Vdc nominal)
Input reverse voltage protection	Fuse recommended
Input surge voltage	100V for 100ms (48V) 50V for 100ms (24V)
Undervoltage lockout	Vin<30-36V (48V) Vin<14-18V (24V)
Efficiency	83% typical (5Vout)

Output

Voltage tolerance	±1.0%
Line regulation	±0.1%
Load regulation	±0.5%
Noise/ripple	75mV P-P
Short circuit protection	Continuous power cycle
Overvoltage protection	36V to 42V (24Vin) 72V to 82V (48Vin)
Transient response	4% Vo typ; recovery <200msec typ (25% step load change)
Temperature coefficient	±0.02%Vo/°C
Switching frequency	330kHz

Control

Enable	on = >7.0Vdc off = >3.5Vdc See TRN
Enable current	0.6ma max.
Output trim	90% to 110% Vo

Isolation

I/O isolation	500Vdc
---------------	--------

AMERICAS

5810 Van Allen Way
 Carlsbad, CA 92008
 Telephone: 760-930-4600
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX, UK
 Telephone: 44 (1384) 842-211
 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
 Tower1, Metroplaza
 223, Hing Fong Road
 Fwai Fong, New Territories
 Hong Kong
 Telephone: 852-2437-9662
 Facsimile: 852-2402-4426







AEV

Ordering Information

Input VDC	Output 1 Voltage	Output 2 Voltage	Efficiency	Model Number
18-36 V	3.3V @ 5.0A		80%	AEV05F24
18-36 V	5.0V @ 4.0A		83%	AEV04A24
18-36 V	12.0V @ 2.1A		85%	AEV02B24
18-36 V	15.0V @ 1.7A		86%	AEV02C24
36-72 V	3.3V @ 5.0A		80%	AEV05F48
36-72 V	5.0V @ 4.0A		83%	AEV04A48
36-72 V	6.0V @ 4.1A		86%	AEV04N48
36-72 V	12.0V @ 2.1A		86%	AEV02B48
36-72 V	15.0V @ 1.7A		86%	AEV02C48
18-36 V	+5.0V @ 2.0A	-5.0V @ 2.0A	83%	AEV02AA24
18-36 V	+12.0V @ 1.05A	-12.0V @ 1.05A	86%	AEV01BB24
18-36 V	+15.0V @ 0.85A	-15.0V @ 0.85A	86%	AEV01CC24
36-72 V	+5.0V @ 2.0A	-5.0V @ 2.0A	83%	AEV01AA48
36-72 V	+12.0V @ 1.05A	-12.0V @ 1.05A	86%	AEV01BB48
36-72 V	+15.0V @ 0.85A	-15.0V @ 0.85A	86%	AEV01CC48

Single output

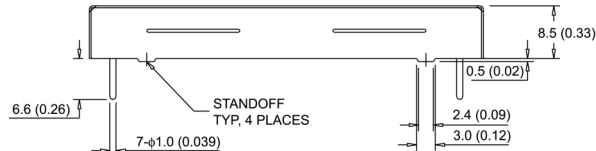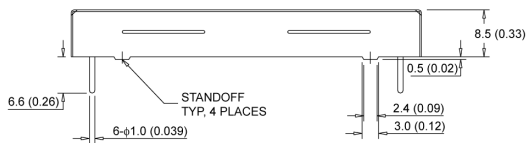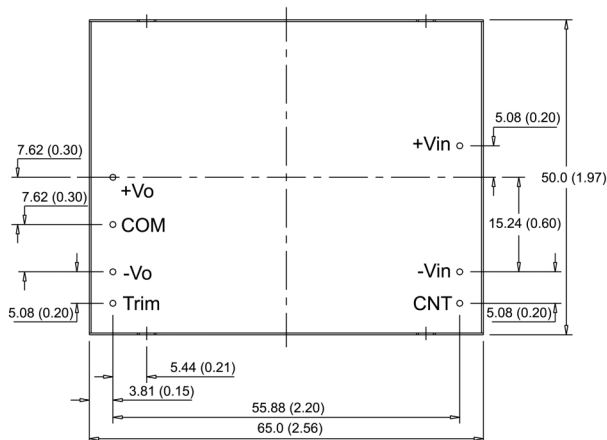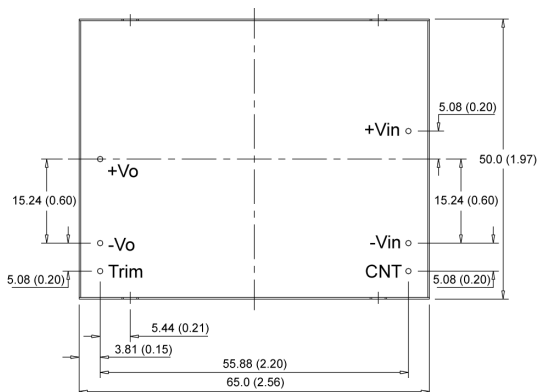

Notes:

- 20 MHz bandwidth. An external 2.2mf ceramic capacitor is recommended to be placed from +V out to -V out.
- Consult Technical Reference Notes for Recommended Input/Output Filtering
- All specifications are typical at nominal line, full load, and 25° C unless otherwise noted.
- All specifications subject to change without notice. Mechanical drawings are for reference only.