

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, grau



250 VAC · 2.5W/10A

GAM
T1 NNO**Description**

- IP 67 from Front-Side
- Screw type fuse carrier

References

General Product Information

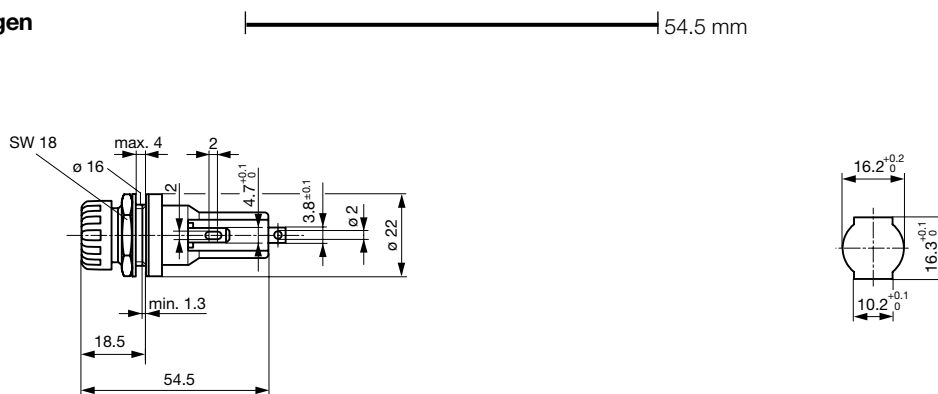
Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Panel Mount, Rear-Side
Mounting	Fixing Nut
Terminal	Solder
Rated Voltage	250VAC
Rated Current	10A
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23 °C
Degree of Protection	IP 67
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, Nature
Material: Cap	Thermoplastic, Nature
Unit Weight (Socket/Cap)	23 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Type, Voltage, Current

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 4mm

Abmessungen

Mounting holes

Variants

Holder	Cap	Degree of Protection	Colour Holder	Colour Cap	Reference	Order Number
●	Fingergrip	IP 67	Grey	Light-Grey	23463P	7092.6150
●	Fingergrip	IP 67	black	black	23463NJP	7092.6160

Packaging Unit Bulk (100 pcs.)